




Features:

- 3 pcs 5050 RGB SMD LEDs per module
- Super thin and excellent design
- Low voltage decay because the PCB and wire are directly connected by screw
- Parallel connection between each module, which makes the current more stable
- Maximum 35 pcs in series connection
- DC12V
- Waterproof index: IP67

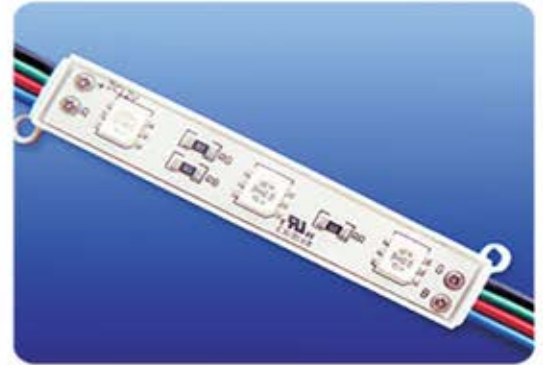


RGB Wireless Controller:

RGB Controller sold separately



Structure Chart:

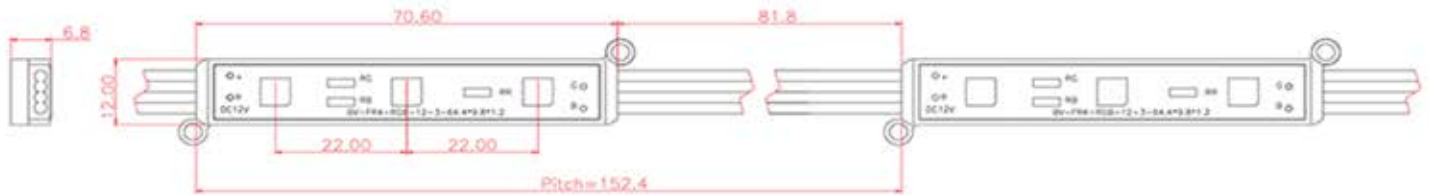

Parameters:

Part No.	Color	Operating Voltage(V)	Current (mA)	Wattage (W)	View Angel	Lumen(mcd)		LEDQty
						min	max	
UL-RGB-3MOD	Red		20	0.24		1500	2100	
	Green		20	0.24		3000	4500	
	Blue		20	0.24		900	1500	
	RGB	12	60	0.72	120	5400	7100	3